

**ALUK<sup>®</sup>**

BSF70 Bi-Fold Door

WELCOMING  
STUNNING  
PRACTICAL

 Quantum Windows

Quantum Windows  
11 Causeway Road  
Corby  
NN17 4DU

01536 260300

[quotes@quantumwindows.co.uk](mailto:quotes@quantumwindows.co.uk)

Aluk BSF70 Bifold Door V1

 Quantum Windows

## ALUK BSF70 BI-FOLD DOOR

An intelligent combination of form and function, our highly versatile and market-leading Bi-fold sliding door system gives you maximum control over the style and operation of the doors.

Multiple panels can be added to accommodate the design specifications of your building, with the option to open in or out as required. The system also boasts a unique flush line pop-out handle that allows for square flush stacking panels when doors are fully open.

### DESIGN FEATURES


- Certified under the Secured By Design scheme
- Tested to PAS 24
- Unique, pop-out handle that allows for maximum door opening and panels to stack square
- Four stainless steel rollers to ensure smooth and consistent operation

### OPTIONS


- Chamfered and square bead options
- Glazing 28mm – 40mm
- Available in a range of opening configurations
- Available with heavy duty rollers; BSF70 HD
- Available in a range of single or dual colour and anodised finishes



### Cill Detail

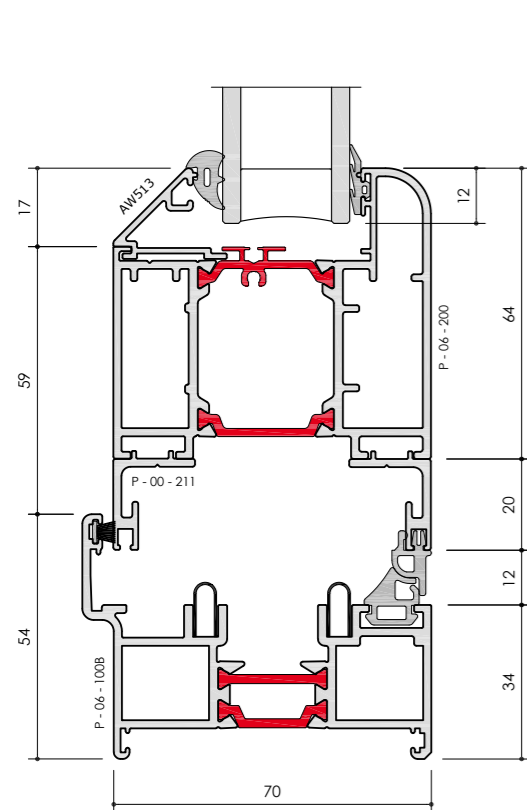

### Interlock Detail

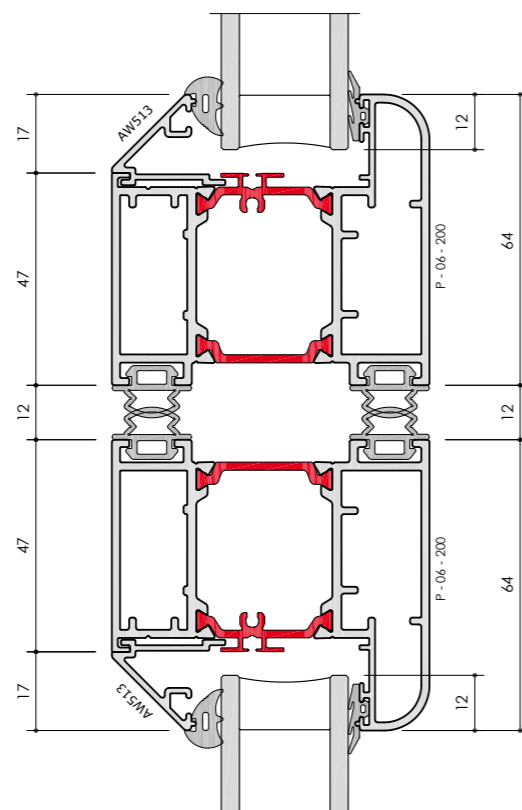

## SPECIFICATIONS

PERFORMANCE AND ACCREDITATION	BSF70	BSF70 HD
• U-value (double glazing)	1.6 W/m <sup>2</sup> K	1.6 W/m <sup>2</sup> K
† U-value (triple glazing)	1.4 W/m <sup>2</sup> K	1.4 W/m <sup>2</sup> K
Air tightness (Pa) (standard threshold)	Class 4 (600 Pa)	
Water tightness (Pa) (standard threshold)	Class 9a (600 Pa)	
Wind load (Pa)	Class AE2400 (2400 Pa)	
Security	PAS 24	
3rd party certification	Q-mark	
Secured by design		

### CONFIGURATIONS

Opening	Open in and open out	Open in and open out
2-2-0		
3-3-0		
3-2-1		
4-4-0		
4-2-2		
4-3-1		
5-5-0		
5-3-2		
5-4-1		
6-6-0		
6-3-3		
6-4-2		
6-5-1		
7-7-0		
7-4-3		
7-5-2		
7-6-1		

### DESIGN FEATURES

Max vent weight	100 kg	130 kg
Sightline (Head)	110mm	110mm
Sightline (Cill)	130mm	130mm
Sightline (Jamb)	110mm	110mm
Sightline (Meeting Stile)	140mm	140mm

### SYSTEM FEATURES

Frame depth	70mm	70mm
Dual colour option		
Multi-point locking		
Glazing options	Internal bead	Internal bead
Glazing thickness	24mm-40mm	24mm-40mm

\* Folding Doors are calculated using EN ISO 10077 - Part 2, 3000mm x 2180mm, 3-3-0 Door with Ug: 1.0 W/m<sup>2</sup>K (double glazed) / 0.7 W/m<sup>2</sup>K (triple glazed) using P-06-100 outerframe and P-06-200 vent. Single and Double Door value is calculated using EN ISO 10077 - Part 2, 2000mm x 2180mm Double Door with Ug: 1.0 W/m<sup>2</sup>K (double glazed) / 0.7 W/m<sup>2</sup>K (triple glazed) using P-06-100 outerframe and P-06-200 vent.

• U-Value (Double Glazing) - Folding Doors are calculated using EN ISO 10077 - Part 2, 3000mm x 2180mm, 3-3-0 Door with Ug: 1.0 W/m<sup>2</sup>K using P-06-100 outerframe and P-06-200 vent. Single and Double Door value is calculated using EN ISO 10077 - Part 2, 2000mm x 2180mm Double Door with Ug: 1.0 W/m<sup>2</sup>K using P-06-100 outerframe and P-06-200 vent.

† U-Value (Triple Glazing) - Folding Doors are calculated using EN ISO 10077 - Part 2, 3000mm x 2180mm, 3-3-0 Door with Ug: 0.7 W/m<sup>2</sup>K using P-06-100 outerframe and P-06-200 vent. Single and Double Door value is calculated using EN ISO 10077 - Part 2, 2000mm x 2180mm Double Door with Ug: 0.7 W/m<sup>2</sup>K using P-06-100 outerframe and P-06-200 vent.

\*Specifications show what can be achieved with the system but not all products will meet them automatically (depending on size, configuration, e.t.c.). Any specific requirements should be discussed with the technical team before ordering. The specifications on this page are subject to change without warning.